





394390



394100



394120




394150




394200



394220




394240




394250




394290




394300




394320



394340



394350




394360




394390



394395



394600



394680



394890

394000 / T394000

## Nordic

– Nordic beauty for all times

Nordic offers the same simple, stringent design as the COM 1000 carpet and is the epitome of a timeless carpet where high quality takes center stage. The classic expression sparks associations to cobblestone paving, which has had significant architectural importance over time with its patterned surfaces in urban spaces. Available both as broadloom, square carpet tiles, ZigZag-Tiles<sup>®</sup>, and as LockTiles<sup>®</sup>.

Available in 18 carefully selected colours. Special colours from +200 m<sup>2</sup>. Felt backing from +200 m<sup>2</sup>.

### Technical data


	Standard	 Broadloom w/Textile	 Broadloom w/Felt	 Tiles
Type of manufacture	ISO 2424	Woven	Woven	Woven
Structure	ISO 2424	Loop pile	Loop pile	Loop pile
Pile material	ISO 2424	100% PA66	100% PA66	100% PA66
Dye method		Continuous dyed	Continuous dyed	Continuous dyed
Primary backing	ISO 2424	PET	PET	PET
Secondary backing	ISO 2424	rPET Textile	rPET Felt	TEXtiles®
 Dimensions/Width	ISO 3018	Approx. 400 cm	Approx. 400 cm	50 x 50 cm (5 m <sup>2</sup> /box)
Surface pile thickness		Approx. 2.80 mm	Approx. 2.80 mm	Approx. 2.80 mm
 Total thickness		Approx. 3.50 mm	Approx 4.50 mm	Approx. 5.0 mm
Total pile mass	ISO 2424	Approx. 550 g/m <sup>2</sup>	Approx. 550 g/m <sup>2</sup>	Approx. 550 g/m <sup>2</sup>
 Total mass	ISO 8543	Approx. 1,900 g/m <sup>2</sup>	Approx. 2,300 g/m <sup>2</sup>	Approx. 3,000 g/m <sup>2</sup>
Stitch rate	ISO 1763	Approx. 156,000/m <sup>2</sup>	Approx. 156,000/m <sup>2</sup>	Approx. 156,000/m <sup>2</sup>
 Antistatic	ISO 6356	≤ 2 kV	≤ 2 kV	≤ 2 kV
 Classification for use	EN 1307	23 Domestic - Intensive use	23 Domestic - Intensive use	23 Domestic - Intensive use
 Classification for use	EN 1307	33 Commercial - Heavy use	33 Commercial - Heavy use	33 Commercial - Heavy use
 Luxury rating class	EN 1307	LC1	LC1	LC1
 Dimensional stability	EN 986	-	-	≤ 0.2 %
 Castor chair suitability	EN 985	Intensive use	Intensive use	Intensive use
 Stair suitability	EN 1963	Intensive use	Intensive use	Intensive use
 Impact sound reduction	ISO 10140	Approx. ΔL <sub>w</sub> 14 dB	Approx. ΔL <sub>w</sub> 18 dB	Approx. ΔL <sub>w</sub> 20 dB
 Sound absorption	EN ISO 354	Approx. 0.10 a <sub>w</sub>	Approx. 0.15 a <sub>w</sub>	Approx. 0.20 a <sub>w</sub>
 Thermal resistance	ISO 8302	Approx. 0.06 m <sup>2</sup> K/W	Approx. 0.09 m <sup>2</sup> K/W	Approx. 0.10 m <sup>2</sup> K/W
 Fireclass	EN 9239-1 EN 13501-1	C <sub>fl</sub> - s1	C <sub>fl</sub> - s1	B <sub>fl</sub> - s1

### Certifications

	Standard	Broadloom w/Textile	Broadloom w/Felt	Tiles
CE	EN 14041	0809-CPR-19006044-C3	0809-CPR-19006044-C3	0809-CPR-19006044-C7
DOP	EN 14041	1118#19006044-C3	1118#19006044-C3	1118#19006044-C7
IACG	EN 16516	Compliant	Compliant	Compliant
M1		Compliant	Compliant	Compliant
BVB (Byggsvaru Bedömningen)		Accepted	Accepted	Accepted
BREEAM NOR		Compliant	Compliant	Compliant
REACH Regulation	EC 1907/2006	Compliant	Compliant	Compliant
POPS Regulation	EC 2019/1021	Compliant	Compliant	Compliant
EPD (GWP-total A1-A3)	ISO 14025 EN 15804	10.7 kg CO <sub>2</sub> eq/m <sup>2</sup>	11.3 kg CO <sub>2</sub> eq/m <sup>2</sup>	13.6 - 15.4 kg CO <sub>2</sub> eq/m <sup>2</sup>
EPD RSL (Reference Service Life)	ISO 14025 EN 15804	25 years	25 years	25 years
Recycled content		100% recycled backing	100% recycled backing	100% recycled backing



### Recommended tile installation

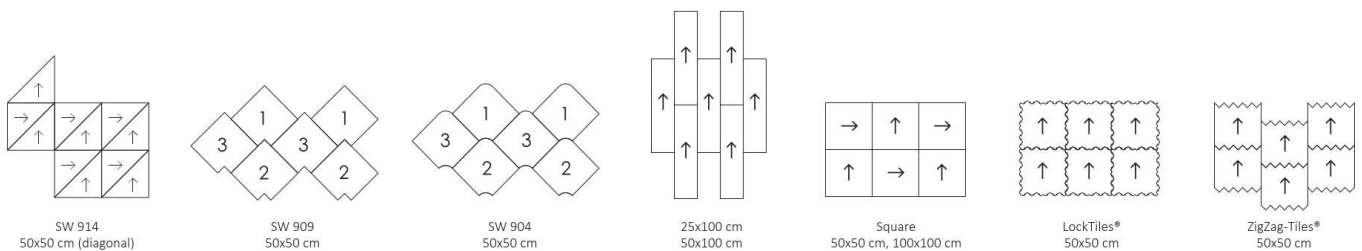

As we continuously improve our products and testing procedures, any above declaration is subject to amendments without prior notice.  
For the latest technical specifications, installation and maintenance guide visit:

[www.fletcocarpets.com](http://www.fletcocarpets.com)